



The Clear Solution For Cost-Effective Void Fill

Easy To Use:



1. Position products together in the carton according to size, leaving only one void area.



2. Insert the inflator nozzle into the Fill-Air® RF bag and place the bag on top of products.



3. With carton flaps partially closed, fill the bag until the void is filled. The clear bag allows for a visual check.



4. Remove nozzle, close remaining flap(s) and tape carton closed.

Fill-Air® RF ...an innovative packaging system

By using air to fill various size voids, the system provides:

Fast and easy use

With minimal training, the operator can easily insert the inflator nozzle into the extended valve for top void fill applications.

Versatility

The extended valve allows for blocking and bracing applications. Fill-Air® RF bags are available in seven sizes for a wide variety of applications.

Environmental advantages

Fill-Air® RF bags can be deflated and reinfated for reuse. Compared to bulky, traditional void fill packaging products, material volume is reduced by up to 90% for superior source reduction.

Reduced storage and handling costs

Fill-Air® RF bags are shipped flat and inflated when used. One carton of 250 RF-4 (410mm x 530mm) bags is the equivalent of up to 18 bags (0,39 cm³ each) of loose fill.

Excellent product protection

Made of extremely durable, clear and flexible film, inflated Fill-Air® RF bags lock items in place to avoid damage from movement during shipping.



Choose the system that's right for you

Controlled inflation process

The operator can inflate bags with the exact amount of air to fill the void, controlling the inflation process from start to finish.

Compact size

Both systems fit into any packaging area eliminating the need for bulky equipment and overhead bins.

Ease of installation

The all-electric, Portable Inflator plugs into a standard 220-240 V outlet. The Pneumatic Inflator requires shop air and a standard 220-240 V outlet.

Reliability


Simple design eliminates service issues.

Flexibility for maximum efficiency and productivity

The Portable Inflator can be set up anywhere. The pneumatic Inflator is ideal for both individual and online workstations.



Fill-Air® RF P40 Portable Inflator

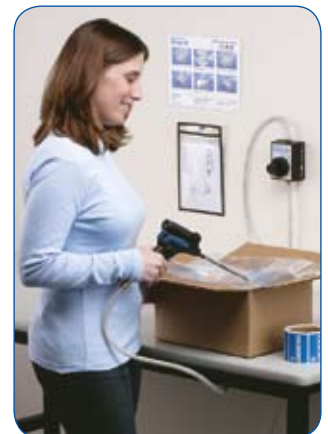

Fill-Air® RF R50 Pneumatic Inflator

Ref	Size (mm)	Qty/carton
RF 1	230 x 280	250
RF 2	280 x 380	250
RF 3	360 x 460	250
RF 4	410 x 530	250
RF 5	460 x 580	250
RF 6	460 x 910	125
RF 7	910 x 1070	100



Protective Packaging
Telford Way, Kettering, Northants NN16 8UN, UK
Tel: +44 (0)1536 315700 Fax: +44 (0)1536 410576
E-mail: PPDeuromktg@sealedair.com
www.fill-air.eu

Our Products Protect Your Products®

Distributed by:

RF-GB-10-01

Corporate offices: Sealed Air Corporation,
200 Riverfront Boulevard, Elmwood Park, NJ 07407, USA
www.sealedair.com

Sealed Air has companies throughout the world.
© Sealed Air Corporation 2010. All rights reserved.

